

(19) World Intellectual Property Organization
International Bureau




(43) International Publication Date
23 October 2003 (23.10.2003)

PCT

(10) International Publication Number
WO 03/088473 A1

- (51) International Patent Classification⁷: **H03B 5/12**
- (21) International Application Number: PCT/NL02/00221
- (22) International Filing Date: 5 April 2002 (05.04.2002)
- (25) Filing Language: English
- (26) Publication Language: English
- (71) Applicant (for all designated States except US): **TELEFONAKTIEBOLAGET L. M. ERICSSON [SE/SE]**;
Telefonvagen 30, SE-126 25 Stockholm (SE).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **VAN ZEIJL, Paulus, Thomas, Maria [NL/NL]**; Dasstraat 52, NL-7559 AD Hengelo (NL).
- (74) Agent: **PRINS, A., W.**; c/o Vereenigde, Nieuwe Parklaan 97, 2587 BN The Hague (NL).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:
— with international search report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: OSCILLATOR CIRCUIT AND OSCILLATOR BIASING METHOD

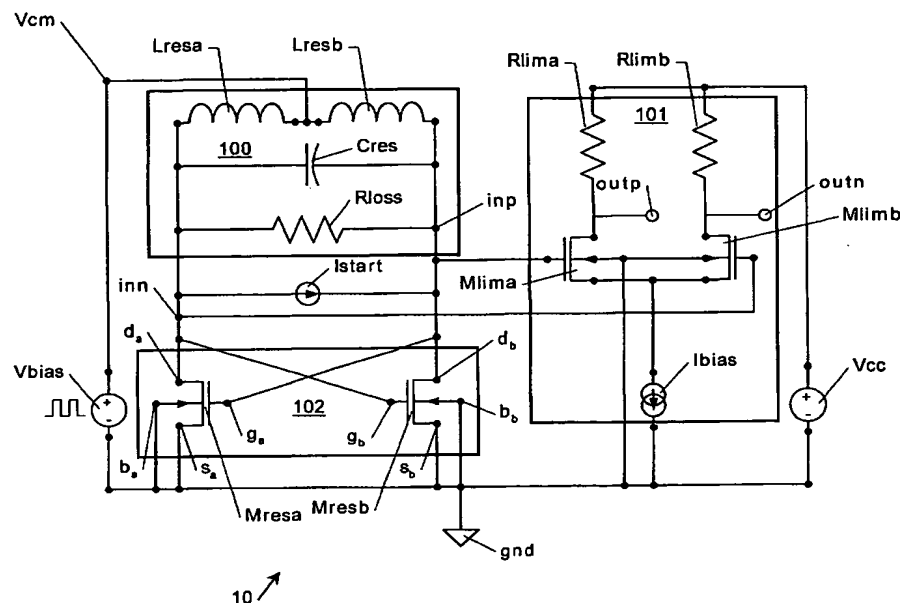

(57) Abstract: An oscillator circuit (1) with an oscillator device (100). The oscillator device has an oscillator bias contact (Vcm). A bias source (Vbias) is connected to said oscillator contact with a source contact. The voltage source includes a varying bias source which in use provides a bias varying in time. The bias source may for example be a switched DC source which in use provides an output signal varying between a first level and a second level.